

NVS4

4-Channel PoE Network Video Recorder for 24/7 Reliable Recording

- Support up to 16MP
- Power over Ethernet
- 4-Channel NVR
- 24/7 Continuous Recording

Specifications

Video/Audio Input	
IP Video Input	Up to 4 IP cameras
Audio Input	N/A
Video/Audio Output	
Video Output	VGA, HDMI
Display Resolution	<ul style="list-style-type: none"> • HDMI: 3840x2160, 1920x1080, 1280x1024, 1280x720, 1024x768 • VGA: 1920x1080, 1280x1024, 1280x720, 1024x768
Audio Output	1CH RCA(add on Speaker)
Decoding	
Video Compression	H.264/H.265
Live View/Playback Resolution	7680x2160, 4608X1728,4512X2512,4096X3072,3840 X2160, 2560X2560, 2560X1920, 2560X1440,2048X1536, 2304X1296,1080P, 720P
Synchronous Playback	Up to 4 channels


HDD	
SATA	1 x SATA for HDD
Capacity	Up to 6TB
External Interface	
USB Interface	2 x USB 2.0
Network Interface	4 x RJ-45, 10/100 Mbps self-adaptive (for IP cameras) 1 x RJ-45, 10/100 Mbps self-adaptive (for LAN/WAN)
PoE	
Max. Power Per Port	25W
Supported Standard	IEEE 802.3af/at
Network	
Network Protocols	HTTP, TCP/IP, UDP, DHCP, P2P, UPNP, RTSP, RTMP,SMTP, SSL/TLS, DNS, DDNS, NTP, FTP
Browsers Supported	Edge, Firefox, Chrome, Safari
OS Supported	PC: Windows, Mac OS; smartphone: iOS, Android
Max. User Access	Max. 20 users (1 admin & 19 user); Max. 12 simultaneous streams (10 sub & 2 mainstreams)
General	
Power Supply	DC 52V
Power Consumption	<10W (Without HDD & PoE)
Working Environment	Temperature: -10°C ~ +45°C (14°F ~ 113°F); Humidity: 10% ~ 90%
Dimensions	255mm(W) x 49.5mm(H) x 232mm(D)
Weight	1.4kg
Warranty	
Limited Warranty	

2-year limited warranty. For support, visit <https://support.reolink.com/hc/en-us/>.

Gallery & Specs



1. Logo
2. Power LED
3. HDD LED
4. Heat Dissipation Hole
5. USB Port

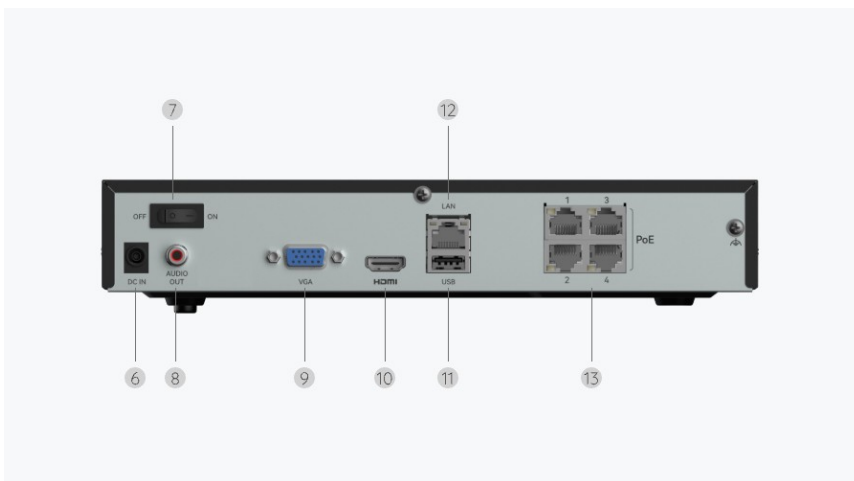

1. DC Port
2. On/Off Switch
3. Audio Out
4. VGA Port
5. HDMI Port
6. USB Port
7. Network
8. RJ45

www.reolink.com