




PONASTAVITEV GESLA NA PoliceTech SNEMALNIKU



1. Ponastavitev gesla


1.1. IP naslov snemalnika vpišite v spletni brskalnik.

1.2. Kliknite na napis “**Forgot password?**”.

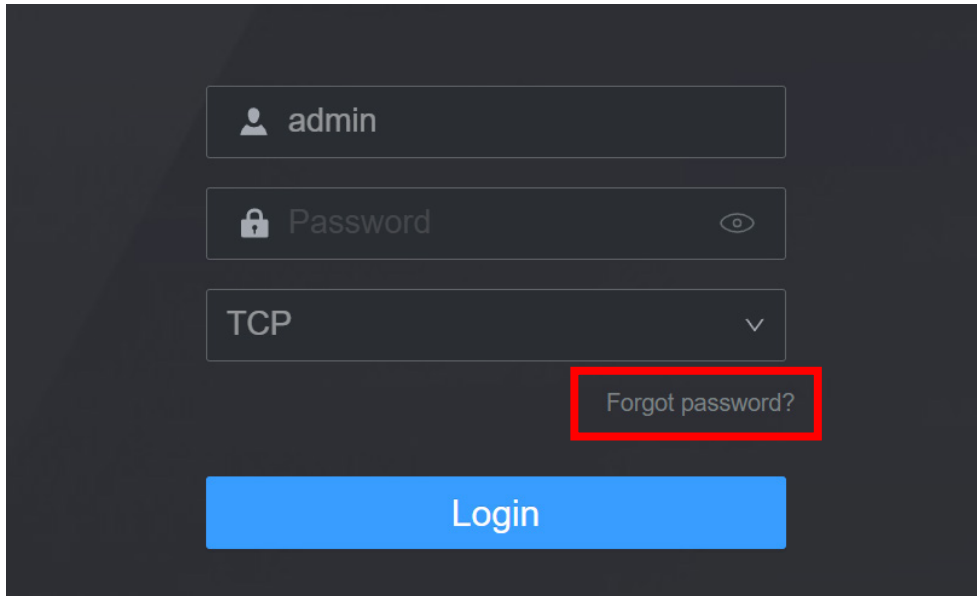

The image shows a login form on a dark background. It contains three input fields: the first with a person icon and the text 'admin', the second with a lock icon and the text 'Password' and an eye icon, and the third with the text 'TCP' and a dropdown arrow. Below these fields is a red rectangular button labeled 'Forgot password?'. At the bottom is a large blue rectangular button labeled 'Login'.


1.3. Kliknite na gumb “**OK**”.

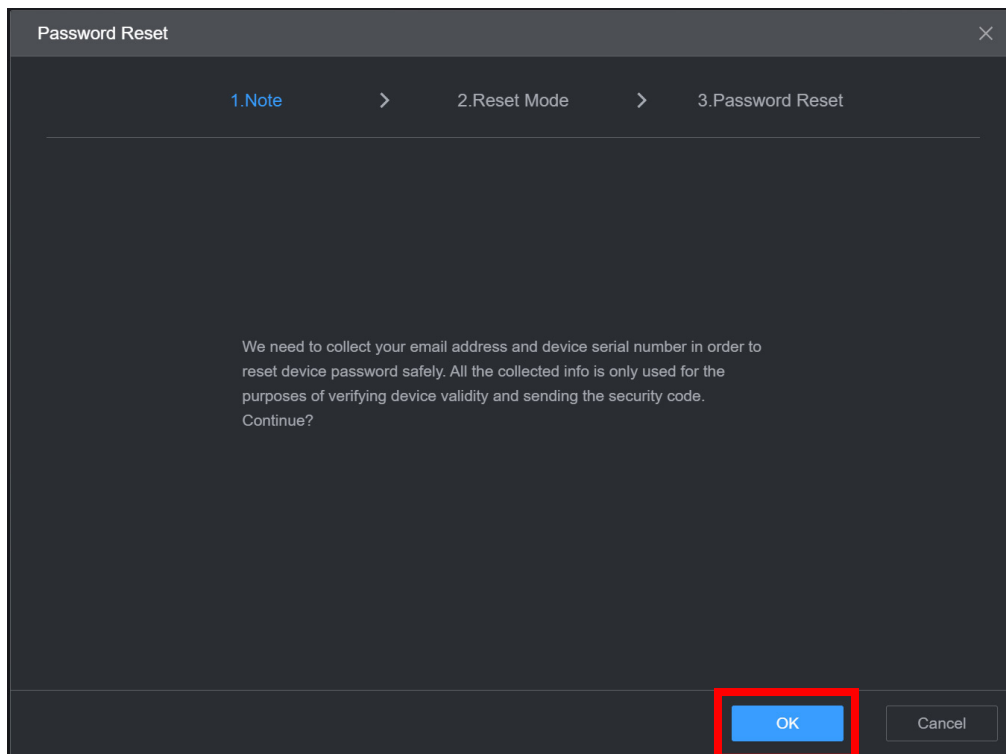

The image shows a 'Password Reset' dialog box with a title bar and a close button. It has a progress bar with three steps: '1.Note' (active), '2.Reset Mode', and '3.Password Reset'. The main text reads: 'We need to collect your email address and device serial number in order to reset device password safely. All the collected info is only used for the purposes of verifying device validity and sending the security code. Continue?'. At the bottom right, there is a red rectangular button labeled 'OK' and a 'Cancel' button.

1.4. "Reset mode" izberite "Email".

*Koda za reset gesla snemalnika bo poslana na mail, ki je bil dodeljen pri inicializaciji snemalnika. V primeru, da v snemalnik ni vpisan mail naslov, bo potrebno snemalnik dostaviti na servis. Prav tako kamere, za katere ne poznate gesla in nimajo fizičnega gumba za ponastavitev.

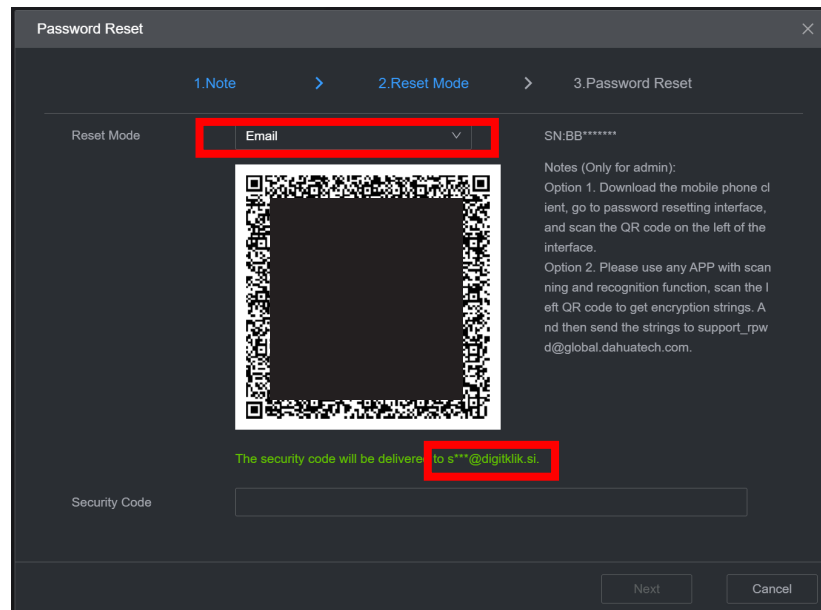


1.5. Na mobilnem telefonu, odprite mobilno aplikacijo DMSS.

1.6. Kliknite na ikono "Me", v spodnjem desnem kotu.


1.7. Kliknite na "Tools".

1.8. Kliknite na "Reset Device Password".


Slika 1.6.

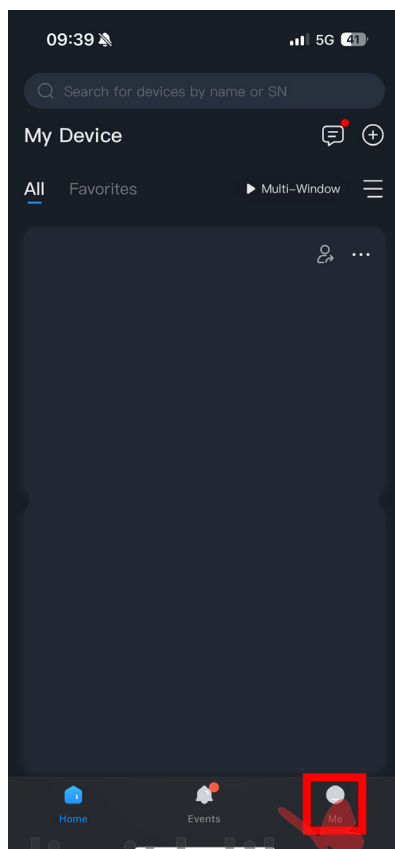

Slika 1.7.

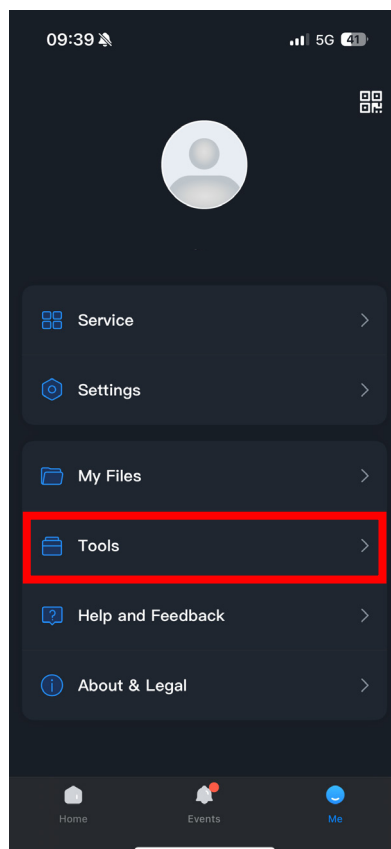

Slika 1.8.

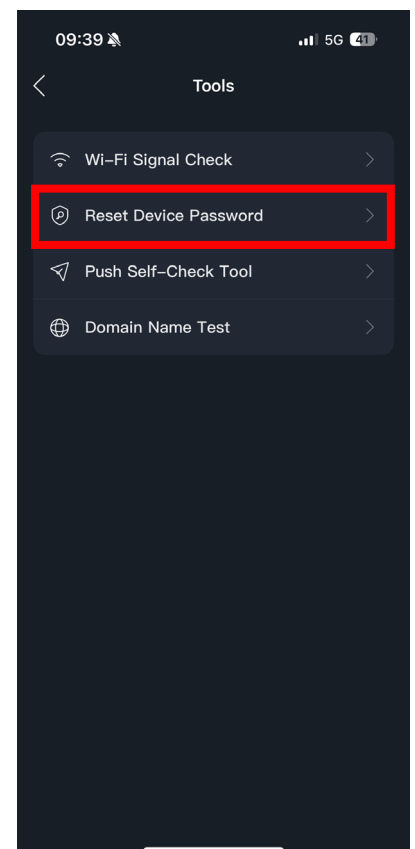


1.9. Kliknite na ikono za skeniranje v zgornjem desnem kotu.

1.10. Skenirajte QR kodo, ki ste jo dobili pod točko 1.4..

Slika 1.9.




Slika 1.10.

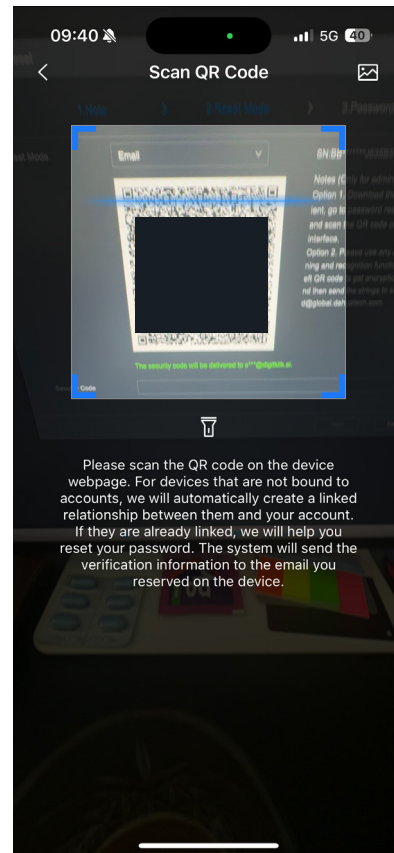


1.11. V nekaj minutah boste na mail, ki je vpisan pod točko 1.4, prejeli kodo za ponastavitev gesla.

**koda je veljavna 24 ur*

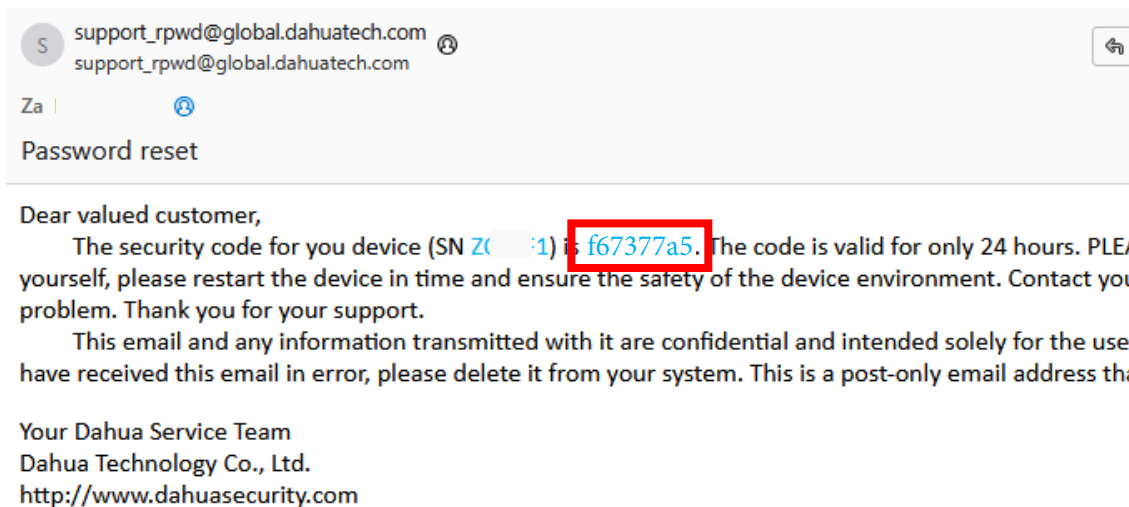

1.12. Prejeto kodo vpišite v polje **“Security Code”** in pritisnite gumb **“Next”**.

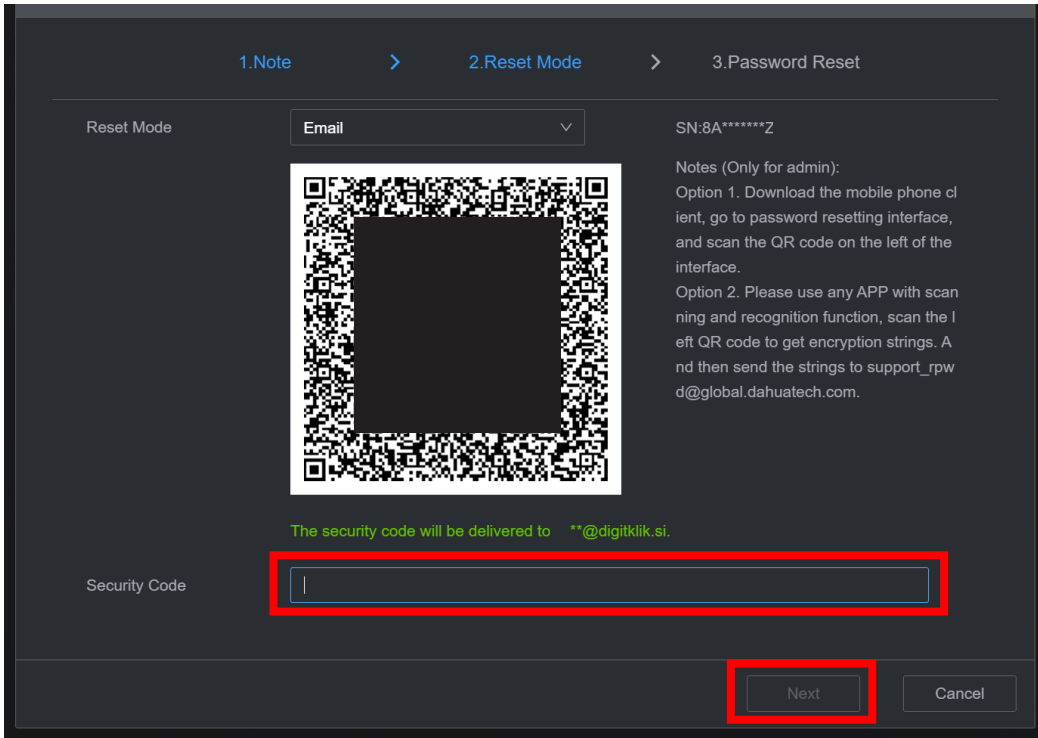

1.Note > 2.Reset Mode > 3.Password Reset

Reset Mode: Email

SN:8A*****Z


Notes (Only for admin):
 Option 1. Download the mobile phone client, go to password resetting interface, and scan the QR code on the left of the interface.
 Option 2. Please use any APP with scanning and recognition function, scan the left QR code to get encryption strings. And then send the strings to support_rpwd@global.dahuatech.com.

The security code will be delivered to **@digitklik.si.

Security Code: [Input field]

Next Cancel

1.13. V polje **“New Password”** vpišite novo geslo za snemalnik, nato isto geslo vnesite še v polje **“Confirm Password”**, da ga potrdite. Pritisnite gumb **“OK”**, da shranite geslo.

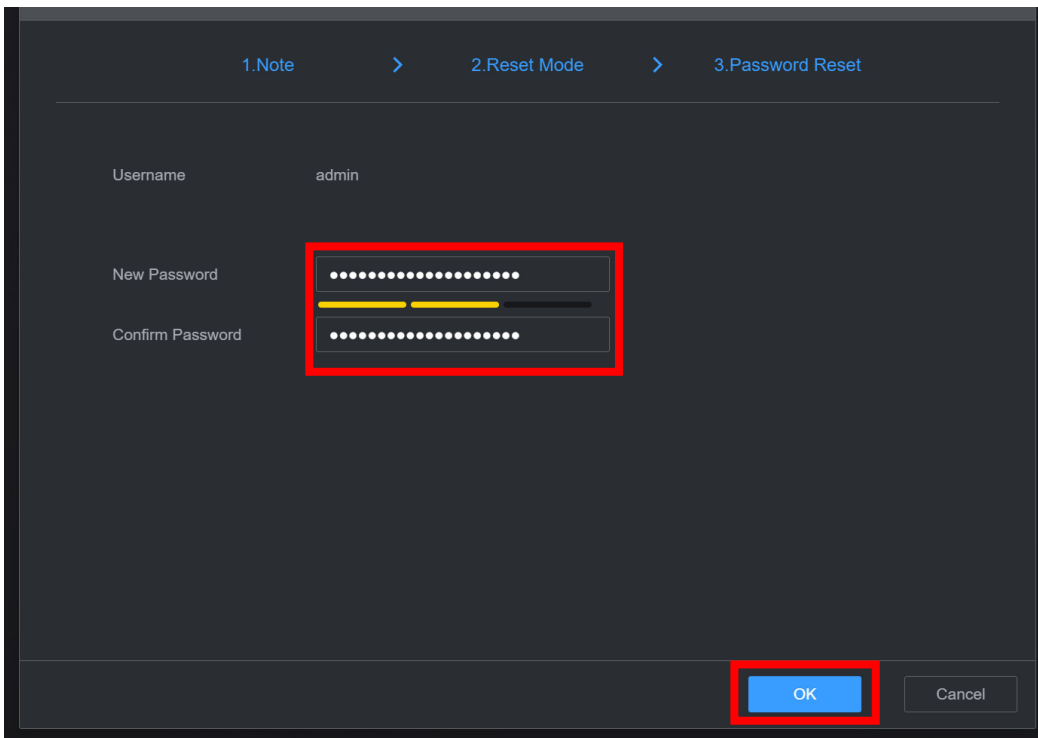

1.Note > 2.Reset Mode > 3.Password Reset

Username: admin

New Password: [Input field with strength indicator]

Confirm Password: [Input field with strength indicator]

OK Cancel

1.14. Če želite isto geslo dodeliti še napravam, ki so že dodane v snemalnik, pritisnite gumb “**OK**”. V primeru, da gesla dodanim napravam ne želite spremeniti, pritisnite gumb “**Cancel**”.

